

Home Standby - 15 kW

Air-Cooled Gas Engine Generator Sets

Continuous Standby Power Rating
15 kW 60Hz LP, 13 kW 60Hz Natural Gas

INCLUDES:

- **Automatic Indoor Rated (NEMA 1) Transfer Switch With Built In 12-Circuit Emergency Load Center** (Models 05381 & 05382 Only)
- **Pre-wired External Connection Box** (Models 05381 & 05382 Only)
- **Flexible Fuel Line**
- **Composite Mounting Pad**
- **Pre-wired conduits** (Models 05381 & 05382 Only)
- **Natural Gas or LP Gas Operation**
- **External GFCI duplex outlet and Internal 12Vdc outlet**
- **UL 2200 Listed**
- **2 Year Limited Warranty**

- Model 05381 - Gray w/ Transfer Switch**
- Model 05382 - Tan w/ Transfer Switch**
- Model 05383 - Gray w/ out Transfer Switch**
- Model 05384 - Tan w/ out Transfer Switch**



FEATURES

- INNOVATIVE DESIGN & PROTOTYPE TESTING** are key components of GENERAC'S success in "IMPROVING POWER BY DESIGN." But it doesn't stop there. Total commitment to component testing, reliability testing, environmental testing, destruction and life testing, plus testing to applicable CSA, NEMA, EGSA, and other standards, allows you to choose Watchdog Power Systems with the confidence that these systems will provide superior performance.
- TEST CRITERIA:**
 - ✓ **PROTOTYPE TESTED**
 - ✓ **SYSTEM TORSIONAL TESTED**
 - ✓ **NEMA MG1-22 EVALUATION**
 - ✓ **MOTOR STARTING ABILITY**
- SOLID-STATE, FREQUENCY COMPENSATED VOLTAGE REGULATION.** This state-of-the-art power maximizing regulation system is standard on all Watchdog models. It provides optimized FAST RESPONSE to changing load conditions and MAXIMUM MOTOR STARTING CAPABILITY by electronically torque-matching the surge loads to the engine.
- SINGLE SOURCE SERVICE RESPONSE** from Generac's dealer network provides parts and service know-how for the entire unit, from the engine to the smallest electronic component. You are never on your own when you own a GENERAC POWER SYSTEM.
- POWER MATCHED TRANSFER SWITCHES.** Long life and reliability are synonymous with GENERAC POWER SYSTEMS. One reason for this confidence is that the Watchdog product line includes its own transfer systems and controls for total system compatibility.



HOME STANDBY SPECIFICATIONS

Home Standby - 15 kW

ENGINE	<ul style="list-style-type: none"> •Generac (OHVI) Design •"Spiny-lok" cast iron cylinder walls •Electronic ignition, spark advance and compression release •Full pressure lubrication system •Low oil pressure shutdown system •High temperature shutdown 	<p>Maximizes engine "breathing" for increased fuel efficiency. Cylinder walls run cooler, reducing oil consumption. Because heat is the primary cause of engine wear, the OHVI has a significantly longer life than competitive engines.</p> <p>Rigid construction and added durability provide long engine life.</p> <p>These features combine to assure smooth, quick starting every time.</p> <p>Superior lubrication to all vital bearings means better performance, less maintenance and significantly longer engine life.</p> <p>Superior shutdown protection prevents catastrophic engine damage due to low oil.</p> <p>Prevents damage due to overheating.</p>
GENERATOR	<ul style="list-style-type: none"> •Revolving field •Skewed stator •Displaced phase excitation •Automatic voltage regulation •UL 2200 Listed 	<p>Allows for smaller, light weight unit that operates 25% more efficiently than a revolving armature generator.</p> <p>Produces a smooth output waveform for compatibility with electronic equipment.</p> <p>Maximizes motor starting capability. Provides more surge capability than brushless generator designs.</p> <p>Regulates the output voltage to $\pm 2\%$ prevents damaging voltage spikes.</p> <p>For your safety</p>
TRANSFER SWITCH	<ul style="list-style-type: none"> •Fully Automatic •Remote Mounting •UL Listed 	<p>Transfers your vital electrical loads to the energized source of power.</p> <p>Mounts near your existing distribution panel for simple, low cost installation.</p> <p>For your safety (Transfer switch is not included with models 05383 and 05384)</p>
MICROPROCESSOR CONTROL	<ul style="list-style-type: none"> •Manual/Auto/Off switch •Utility voltage sensing •Utility interrupt delay •Engine warm-up •Engine cool-down •Seven day exerciser •Timed Trickle Battery charger •Main Line Circuit Breaker 	<p>Selects the operating mode.</p> <p>Constantly monitors utility voltage, setpoints 60% dropout, 70% pick-up, of standard voltage.</p> <p>Prevents nuisance start-ups of the engine, set point approximately 10 seconds.</p> <p>Ensures engine is ready to assume the load, setpoint approximately 10 seconds.</p> <p>Allows engine to cool prior to shutdown, setpoint approximately 1 minute.</p> <p>Operates engine to prevent oil seal drying and damage between power outages.</p> <p>Maintains battery amperage to insure starting.</p> <p>Protects generator from overload.</p>
UNIT	<ul style="list-style-type: none"> •Weather protective enclosure •Enclosed critical grade muffler •Small, compact, attractive 	<p>Ensures protection against mother nature. Hinged key locking roof panel for security. Electrostatically applied epoxy paint for durability.</p> <p>Quiet, critical grade muffler is mounted inside the unit to prevent injuries.</p> <p>Makes for an easy, eye appealing installation.</p>
INSTALLATION SYSTEM	<ul style="list-style-type: none"> •Pre-wired External Connection Box •1' Flexible Fuel Line •Composite Mounting Pad •Pre-wired conduits •UL Listed wire nuts 	<p>Easy Installation - Virtually all hardware included, plus step-by-step photographed Installation Guide.</p> <p>(Models 05383 and 05384 include only the flex fuel line and composite mounting pad.)</p>

GENERATOR		Models 05381, 05382, 05383, & 05384 (15 kW)
Rated Maximum Continuous Power Capacity (LP).....	15,000 Watts*	
Rated Maximum Continuous Power Capacity (NG).....	13,000 Watts*	
Rated Voltage.....	120/240	
Rated Maximum Continuous Load Current		
120 Volts	108.3 NG/125.0 LP	
240 Volts	54.2 NG/62.5 LP	
Main Line Circuit Breaker	65 Amp	
Phase	1	
Number of Rotor Poles	2	
Rated AC Frequency	60Hz	
Power Factor	1	
Battery Requirement (not included)	Group 26	
	12 Volts and	
	525 Cold-cranking	
	Amperes Minimum	
Shipping Weight (Includes Transfer Switch)	487 Pounds	
Dimensions (L" x W" x H").....	48 x 24 x 28-1/4	
Sound output in dB(A) at 23 ft. with generator operating at full load.....	71.5	
ENGINE		Models 05381, 05382, 05383, & 05384 (15 kW)
Type of Engine.....	GENERAC OHVI V-TWIN	
Number of Cylinders.....	2	
Rated Horsepower.....	30 @ 3,600 rpm	
Displacement.....	992cc	
Cylinder Block.....	Aluminum w/Cast Iron Sleeve	
Valve Arrangement.....	Overhead Valve	
Ignition System.....	Solid-state w/Magneto	
Compression Ratio.....	9.5:1	
Starter.....	12Vdc	
Oil Capacity Including Filter.....	Approx. 1.7 Qts.	
Operating RPM.....	3,600	
Fuel Consumption		
Natural Gas	cu.ft./hr.	
.....	1/2 Load	156
.....	Full Load	220
Liquid Propane.....	ft ³ /hr(gal/hr)	
.....	1/2 Load	58 (1.58)
.....	Full Load	88 (2.40)
Required fuel pressure to generator fuel inlet at all load ranges - 5 to 7 inches of water column for natural gas, 11 to 14 inches of water column for LP gas		
CONTROLS		
Mode Switch		
-Auto	Automatic Start on Utility failure/7 day exerciser	
-Off	Stops unit. Power is removed Control and charger still operate	
-Manual/Test (start)	Start with starter control, unit stays on. If utility fails, transfer to load takes place.	
Engine Start Sequence		
	Cyclic cranking: 7 sec. on, 7 rest (90 sec. maximum duration)	
Engine Warm-up	10 seconds	
Engine Cool-Down	1 minute	
Starter Lock-out	Starter cannot re-engage until 5 sec. after engine has stopped.	
2.5 Amp Timed Trickle Battery Charger	Standard	
Automatic Voltage Regulator w/Overvoltage Protection	Standard	
Automatic Low Oil Pressure Shutdown	Standard	
Overspeed Shutdown	Standard, 72Hz	
High Temperature Shutdown	Standard	
Overcrank Protection	Standard	
Safety Fuse	Standard	

Rating definitions - Standby: Applicable for supplying emergency power for the duration of the utility power outage. No overload capability is available for this rating. (All ratings in accordance with BS5514, ISO3046 and DIN6271). * Maximum wattage and current are subject to and limited by such factors as fuel Btu content, ambient temperature, altitude, engine power and condition, etc. Maximum power decreases about 3.5 percent for each 1,000 feet above sea level; and also will decrease about 1 percent for each 12° C (10° F) above 15.5° C (60°F).

TRANSFER SWITCH & EMERGENCY LOAD CENTER

Models 05381 and 05382 Only

No. of Poles	2
Current Rating (amps)	100
Voltage Rating (VAC)	250
Utility Voltage Monitor (fixed)	
-Pick-up	70%
-Dropout	60%
Return to Utility	approx. 13 sec.
Exerciser weekly for 12 minutes	Standard
UL Listed	Standard
Dimensions (H" x W" x D")	26.5 x 12.5 x 7
Total of Pre-wired Circuits	12
No. 15A 120V	5
No. 20A 120V	3
No. 20A 240V	1*
No. 30A 240V	1*

* A 240V circuit equals 2 circuits in the home's main distribution panel and in the generators load center.


Circuit Breaker Protected

Available RMS Symmetrical Fault Current @ 250 Volts

10,000

Transfer Switch Features

- Electrically operated, mechanically-held contacts for fast, positive connections.
- Rated for all classes of load, 100% equipment rated, both inductive and resistive.
- 2 pole, 250 VAC contactors.
- 160 millisecond transfer time.
- Dual coil design.
- Main contacts are silver plated or silver alloy to resist welding and sticking.
- NEMA 1 (indoor rated) enclosure is standard on the 100 amp switch.

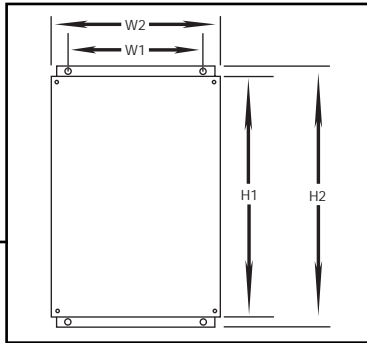

Mechanical Dimensions (in inches)

Current Rating	No. of Poles	Height		Width		Depth
		H1	H2	W1	W2	
100 UL Listed	2	26.5	29.25	8.14	12.5	7

Terminal Wire Ranges

ATS Rated Amps	Switch Terminal	Neutral Lug/Stud	Ground Lug
100A 2-Pole UL	1 x 1/0-12	1 x 3/8-16 Stud	1 x 2/0-14

